


Wideband-LNB

- Compatible with the optical transmitters OSW 1310/6 and OSW 1550/6
- Absolutely necessary if terrestrial signals are to be feed in
- Suitable for satellite antennas with a 40 mm LNB mount (KEA 650/75/850/1000)
- Integrated 2.4GHz lowpass

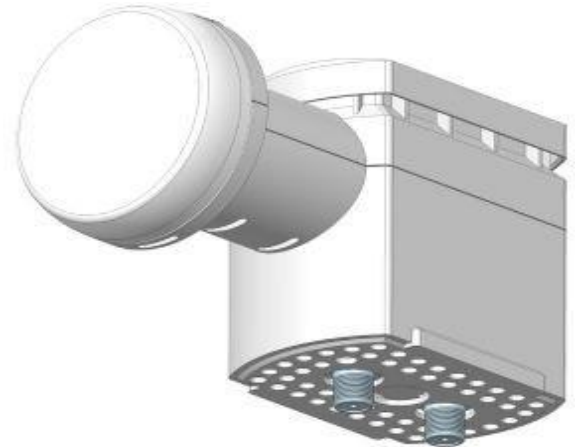

Technical Data:

Typ:	KEL 300/W
Order No.:	201500004
Input frequency:	10,70 – 12,75 GHz
Gain:	55 dB
Output frequency:	300 – 2350 MHz
Oscillator frequency (L.O.):	10,4 GHz
Supply voltage:	10 – 20 V
Power consumption:	max.2 W
Output:	2 x F
Dimensions LNB mount:	Ø 40 mm
Perm. Ambient temperature::	-30 +60 °C
Dimensions (W x H x D):	141 x 89 x 63 mm
Packaging unit/weight:	1/0,35 St./kg

